



624	17
-----	----

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	FINISH	QTY.
1	62445	CABLE TIE MOUNT .11"(2.8mm) X .23"(5.9mm) SLOT	POM-BLACK POLYOXYMETHYLENE		1
2	82004B	15LB., N39M, Ø.9" (23.2mm) MAGNET MOUNT Ø.256" (6.5mm) HOLE, BLACK	CUP-CRS DC01 MAGNET-NdFeB 39M	CUP-BLACK EPOXY MAGNET-NICUNI	1







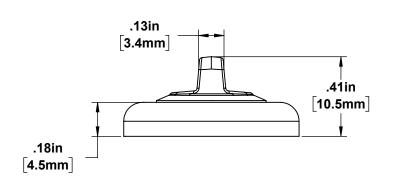

UL LISTING Large MagneticCable Tie Mount			
ANSI/UL 62275	Positioning Devices TYPE 21 E359769	Mechanical Tensile Strength:	
CAN	CSA-C22.2 No. 62275	15 LBS. (67Ň)	

ALL TESTING PERFORMED USING 3mm MIN. THICK 1008-1010 STEEL PLATE

TENSILE PULL DIRECTION

PLENUM RATED AH-2

Suitable in air handling systems

Please read before use! Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. Please test the pull force before any usage. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages.

CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.

INDOOR USE RECOMMENDED

OPERATING TEMPERATURE; -40° - 176° F (-40°- 80°C)

