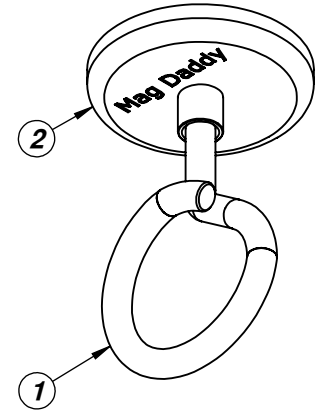
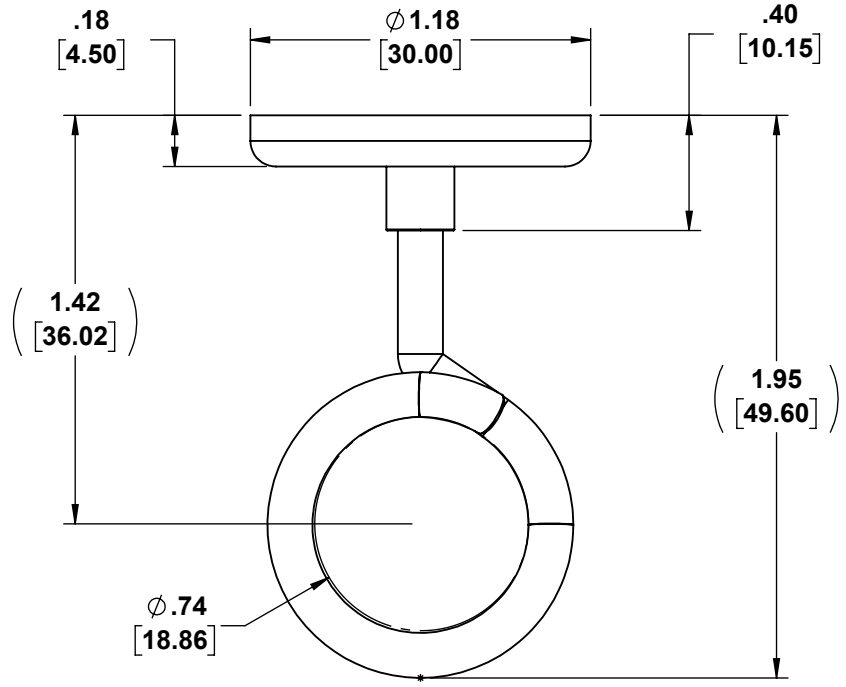




# BRM75

ITEM NO.	PART NUMBER	DESCRIPTION	Material	Finish	QTY.
1	BR2T075	3/4" BRIDLE RING W/10-24 SCREW THREADS	CRS STEEL	NiCuNi	1
2	MAGTF	10-24 FEMALE THREAD, N45, NEODYMIUM MAGNET MOUNT, 40lbs. Ø 1.18" (30mm)	CUP-CRS DC01 Steel MAGNET-NdFeB 45M	CUP-NiCuNi MAGNET-NiCuNi	1





 <b>UL LISTING</b> <b>Magnetic Bridle Ring 3/4 BRM75</b>		
ANSI/UL 1565	Positioning Devices E359769	Mechanical Tensile Strength: 40 LBS. (178N)
CAN	CSA-C22.2 No. 18.5	
ALL TESTING PERFORMED USING 3mm MIN. THICK 1008-1010 STEEL PLATE		



**Please read before use!** Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. *Please test the pull force before any usage.* Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages.  
 CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.

## INDOOR USE RECOMMENDED

OPERATING TEMPERATURE; -40° - 176° F (-40° - 80°C)

CONFIDENTIAL: USE OF THIS DRAWING WITHOUT WRITTEN AUTHORIZATION BY MAG-DADDY, LLC IS PROHIBITED		INCH <input checked="" type="checkbox"/> SCALE: 1.5:1 MM <input type="checkbox"/>	Sheet Size: <b>A</b>
GENERAL TOLERANCE:  UNLESS OTHERWISE SPECIFIED: ± .020 (.51)  ANGLES: ± 5°	THIRD ANGLE  PROJECTION	 295 Jamie Ln. Wauconda, IL 60084 www.magdaddyusa.com PH:(847) 719-5600	
MATERIAL:	PART DESCRIPTION:	APV.	DATE:
SEE BOM	3/4" Magnetic Bridle Ring W/10-24 Threads, 40 lb.	Rev: 01	SS DATE: 05/30/2023
		PART NO.	<b>BRM75</b>