
M	Α	G ⁻	ΓF	6
IVI	\vdash	U	IΓ	U

IT	EM NO.	PART NUMBER	DESCRIPTION	MATERIAL	FINISH	QTY.
	1	MAGTF6 CUP Ø30mm	MAGNET CUP ASSEMBLY W/ 6-32 THREADED STANDOFF	CRS DC01 Steel	ZINC	1
	2	MAGNET 40LB. Ø25mm	40lb. Ø25MM MAGNET	NdFeB 45M	NiCuNi	1





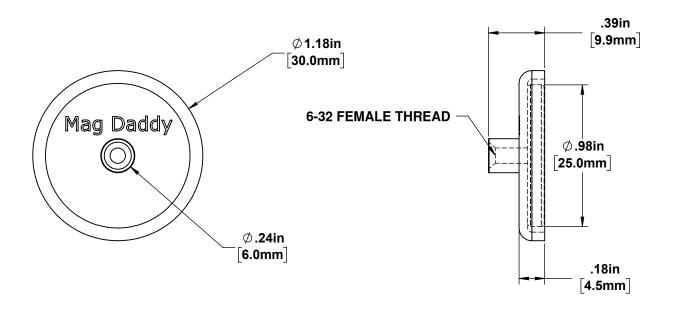

Mechanical Tensile Strength:

40 LBS. (178N)

CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.


TENSILE PULL

ALL TESTING PERFORMED USING 3mm MIN. THICK 1008-1010 STEEL PLATE

Please read before use! Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. Please test the pull force before any usage. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages.

INDOOR USE RECOMMENDED

OPERATING TEMPERATURE - -40° - 176° F (-40°- 80°C)

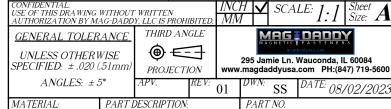

MATERIAL: SEE BOM

6-32 Female Threaded Magnet Mount, 40 lbs MAGTF6

LAST PRINT DATE: 8/2/2023