
| MM200 | |
|-------|--|
|-------|--|

| ITEM NO. | PART NUMBER | DESCRIPTION | MATERIAL | FINISH | QTY. |
|----------|-------------|---|--|-----------------------------|------|
| 1 | MAGTF | 10-24 FEMALE THREAD, N45, NEODYMIUM MAGNET MOUNT, 40lbs. Ø 1.18" (30mm) | CUP-CRS DC01 Steel MAGNET-NdFeB 45M | CUP-NICUNI MAGNET-NICUNI | 3 |
| 2 | 72438 | 10-24 X 3/8" 18-8 STAINLESS STEEL PAN HEAD PHILLIPS SCREW | 18-8 STAINLESS STEEL | PASSIVATED | 3 |
| 3 | 1172440 | 10-24 X 1/2" 18-8 STAINLESS STEEL PAN HEAD PHILLIPS SCREW | 18-8 STAINLESS STEEL | PASSIVATED | 3 |

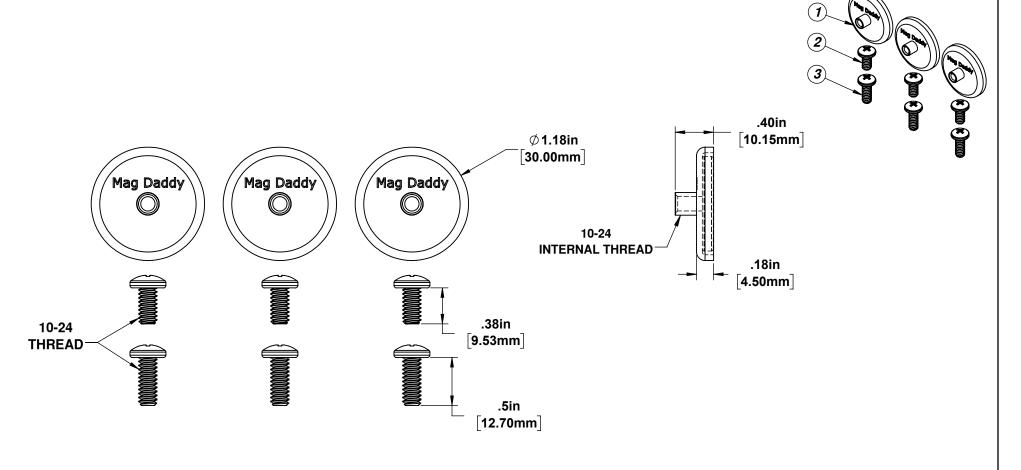


Please read before use! Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. Please test the pull force before any usage. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages.

CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.

INDOOR USE RECOMMENDED

OPERATING TEMPERATURE - -40° - 176° F (-40°- 80°C)

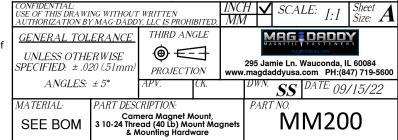

LAST PRINT DATE: 10/31/2023