

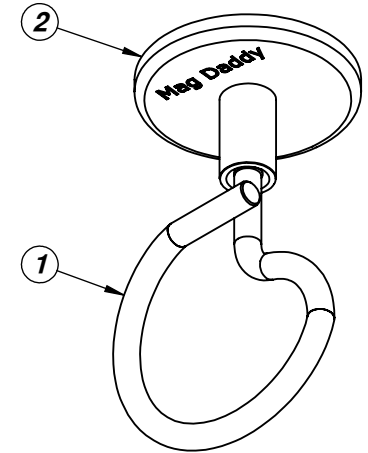


# BRM4T125

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	FINISH	QTY.
1	1.25 Bridle Ring	1-1/4" I.D. BRIDLE RING, 1/4-20 THREAD	304 Stainless Steel		1
2	MAG4TF	1/4-20 FEMALE THREAD, 45M NEODYMIUM MAGNET MOUNT, 90lbs. Ø1.57" (40mm)	CUP-CRS DC01 Steel MAGNET-NdFeB 45M	CUP-NiCuNi MAGNET-NiCuNi	1

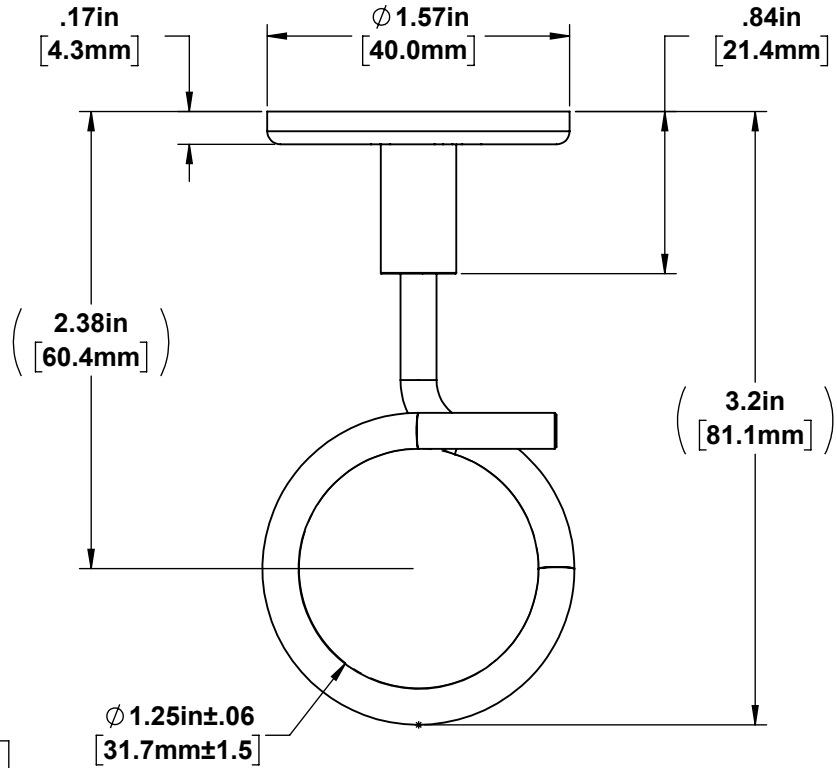

UL LISTING		
Magnetic Bridle Ring 1-1/4" BRM4T125		
ANSI/UL 1565	Positioning Devices E359769	Mechanical Tensile Strength: 75 LBS. (333N)
CAN	CSA-C22.2 No. 18.5	
ALL TESTING PERFORMED USING 3mm MIN. THICK 1008-1010 STEEL PLATE		


## PLENUM RATED AH-1

### Suitable in air handling systems

**Please read before use!** Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. *Please test the pull force before any usage.* Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages. CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.

## INDOOR USE RECOMMENDED

OPERATING TEMPERATURE; -40° - 176° F (-40° - 80°C)

CONFIDENTIAL: USE OF THIS DRAWING WITHOUT WRITTEN AUTHORIZATION BY MAG-DADDY, LLC IS PROHIBITED		INCH <input checked="" type="checkbox"/> MM	SCALE: 1:1	Sheet Size: A
GENERAL TOLERANCE: UNLESS OTHERWISE SPECIFIED: ± .020 (.51mm)	THIRD ANGLE PROJECTION			
ANGLES: ± 5°	APV.	Rev: 03	DWN. SS	DATE: 01/29/2024
MATERIAL: SEE BOM	PART DESCRIPTION: 1-1/4" Magnetic Bridle Ring W/ 1/4"-20 Threads, 75LBS.	PART NO. BRM4T125		